




DIN 69893 - HSK
DIN 69893 - HSK

Kegel / Stopka	Spannweite / Rozsah upnutí mm	A mm	D mm	Art.-Nr. / Obj. č.	EUR
63 A	1-13	107	45	● 82-631330	271,40
63 A	1-16	112	50	● 82-631630	273,30
100 A	1-16	127	50	● 82-1001630	322,50



DIN 69880 (VDI) - mit Kühlmitteldüsen
DIN 69880 (VDI) – s chladicími tryskami

VDI	Spannweite / Rozsah upnutí mm	A mm	D mm	Art.-Nr. / Obj. č.	EUR
25	1-13	87	50	✱ 82-341325	292,70
30	1-13	87	50	● 82-341330	288,20
30	1-16	92	55	● 82-341630	307,30
40	1-13	88	50	● 82-341340	294,60
40	1-16	93	55	● 82-341640	314,70
50	1-16	101,5	55	● 82-341650	366,50

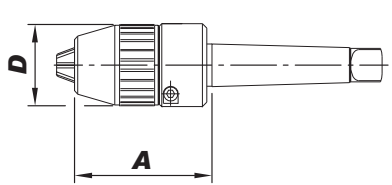

Mit Morsekegel und Austreibklappen
S Morse kuželem a vyrážačem

MK / MT	Spannweite / Rozsah upnutí mm	A mm	D mm	Art.-Nr. / Obj. č.	EUR
MK 3	1-16	86	50	● 82-221603	250,80
MK 4	1-16	86	50	● 82-221604	269,90
MK 5	1-16	86	50	● 82-221605	350,90



Nach ISO 26623-1 - Polygonalkegel
ISO 26623-1 – polygonální kužel

Größe / Rozměr	Spannweite / Rozsah upnutí mm	A mm	D mm	Art.-Nr. / Obj. č.	EUR
6	1-13	105,4	45	✱ 82-261306	413,90
6	1-16	110,8	50	✱ 82-261606	432,60

