

# Mitlaufender Zentrierkegel BASIC

## Otočné středící kužely BASIC




### Mitlaufender Zentrierkegel

#### Otočný středící kužel

- gehärtet und geschliffen

- Kalený a broušený

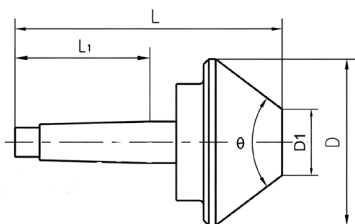

MK / MT	D mm	D1 mm	L mm	L1 mm	Winkel / Úhel	Drehzahl / Otáčky max.	Werkst. / Obrobek max. kg	Art.-Nr. / Obj. č.	EUR
2	60	20	132	64	60°	4000	200	13-MLZK-2/60	84,40
3	100	30	170	81	60°	3000	600	13-MLZK-3/100	118,20
4	160	40	232	102,5	60°	1900	800	13-MLZK-4/160	177,40
5	200	40	252	129,5	75°	1500	1600	13-MLZK-5/200	241,10
5	250	57	281	129,5	75°	1300	1800	13-MLZK-5/250	325,00
6	250	57	355	182	75°	1200	2000	13-MLZK-6/250	572,30

5

Körnerspitzen / Soustružnické hroty

