


Rohlinge DIN 69871
Polotovary DIN 69871


Größe / Rozměr	D mm	A mm	Art.-Nr. / Obj. č.	EUR
40	40	280	13-2191-40-40-280	95,50
40	63	160	13-2191-40-63-160	85,90
40	63	250	13-2191-40-63-250	104,90
50	50	330	13-2191-50-50-330	143,00
50	97	315	13-2191-50-97-315	161,50



Bohrfutter DIN 69871
Vrtací sklíčidla DIN 69871

- inkl. Hakenschlüssel - Vč. hákového klíče

Größe / Rozměr	Spannweite / Kapacita mm	D mm	A mm	Rundlaufgenauigkeit / Házení mm	Art.-Nr. / Obj. č.	EUR
SK 40	1-13	50	95	0,05	13-7655-40-13	100,00
SK 40	3-16	57	100	0,05	13-7655-40-16	108,40
SK 50	3-16	55	115	0,05	13-7655-50-16	148,50

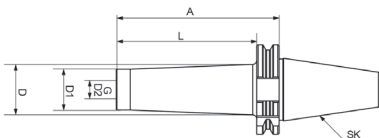

Gewuchtet G = 6,3 15.000 U/min.
Vyvážení G = 6,3 15 000 U/min.

Fräseraufnahme DIN 69871 für Einschraubfräser
Šroubovací frézovací trny DIN 69871

Größe / Rozměr	G	D2 mm	D1 mm	D mm	A mm	L mm	Art.-Nr. / Obj. č.	EUR
SK 40	M8	8,5	13	15	44	25	13-FASK40-M8-25	60,50
SK 40	M8	8,5	13	23	69	50	13-FASK40-M8-50	60,50
SK 40	M8	8,5	13	23	94	75	13-FASK40-M8-75	60,50
SK 40	M10	10,5	18	20	44	25	13-FASK40-M10-25	60,50
SK 40	M10	10,5	18	23	69	50	13-FASK40-M10-50	60,50
SK 40	M10	10,5	18	28	94	75	13-FASK40-M10-75	60,50
SK 40	M12	12,5	21	24	44	25	13-FASK40-M12-25	60,50
SK 40	M12	12,5	21	24	69	50	13-FASK40-M12-50	60,50
SK 40	M12	12,5	21	31	94	75	13-FASK40-M12-75	60,50
SK 40	M12	12,5	21	33	119	100	13-FASK40-M12-100	70,60
SK 40	M16	17	29	29	44	25	13-FASK40-M16-25	64,50
SK 40	M16	17	29	34	69	50	13-FASK40-M16-50	64,50
SK 40	M16	17	29	34	94	75	13-FASK40-M16-75	64,50
SK 40	M16	17	29	36	119	100	13-FASK40-M16-100	75,60
SK 40	M16	17	29	40	144	125	13-FASK40-M16-125	95,80

Weitere Größen siehe nächste Seite
rozměry viz následující strana

