


DIN 69871

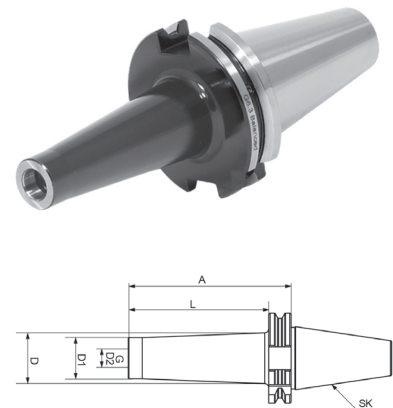

Gewuchtet G = 6,3 15.000 U/min.
Vyvážení G = 6,3 15 000 U/min.

Fräseraufnahme DIN 69871 für Einschraubfräser
Držáky pro šroubovací frézy DIN 69871

Größe / Rozměr	G	D2 mm	D1 mm	D mm	A mm	L mm	Art.-Nr. / Obj. č.	EUR
SK 50	M8	8,5	13	23	69	50	13-FASK50-M8-50	94,50
SK 50	M8	8,5	13	25	119	100	13-FASK50-M8-100	112,70
SK 50	M10	10,5	18	23	69	50	13-FASK50-M10-50	94,50
SK 50	M10	10,5	18	32	119	100	13-FASK50-M10-100	112,70
SK 50	M12	12,5	21	24	69	50	13-FASK50-M12-50	94,50
SK 50	M12	12,5	21	33	119	100	13-FASK50-M12-100	112,70
SK 50	M12	12,5	21	40	169	150	13-FASK50-M12-150	129,50
SK 50	M16	17	29	34	69	50	13-FASK50-M16-50	94,50
SK 50	M16	17	29	36	119	100	13-FASK50-M16-100	112,70
SK 50	M16	17	29	43	169	150	13-FASK50-M16-150	129,50

