



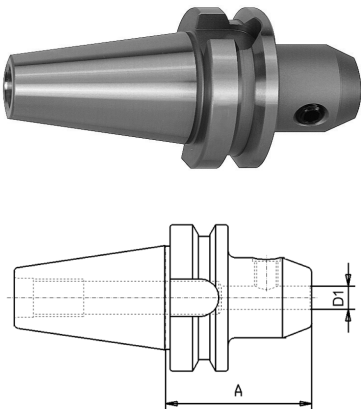

Gewuchtet G = 6,3 15.000 U/min.  
Vyvážení G = 6,3 15 000 U/min.

Flächenspannfutter WELDON MAS BT  
Adaptéry stopkových fréz WELDON MAS BT

| Größe /<br>Rozměr | D1<br>mm | A<br>mm | Art.-Nr. /<br>Obj. č. | EUR   |
|-------------------|----------|---------|-----------------------|-------|
| BT 40             | 6        | 50      | 13-7624-40-6-50       | 40,70 |
| BT 40             | 6        | 100     | 13-7624-40-6-100      | 43,80 |
| BT 40             | 8        | 50      | 13-7624-40-8-50       | 40,70 |
| BT 40             | 8        | 100     | 13-7624-40-8-100      | 43,80 |
| BT 40             | 10       | 63      | 13-7624-40-10-63      | 40,70 |
| BT 40             | 10       | 100     | 13-7624-40-10-100     | 43,80 |
| BT 40             | 12       | 63      | 13-7624-40-12-63      | 40,70 |
| BT 40             | 12       | 100     | 13-7624-40-12-100     | 43,80 |
| BT 40             | 14       | 63      | 13-7624-40-14-63      | 40,70 |
| BT 40             | 16       | 63      | 13-7624-40-16-63      | 40,70 |
| BT 40             | 16       | 100     | 13-7624-40-16-100     | 43,80 |
| BT 40             | 18       | 63      | 13-7624-40-18-63      | 44,50 |
| BT 40             | 20       | 63      | 13-7624-40-20-63      | 40,70 |
| BT 40             | 20       | 100     | 13-7624-40-20-100     | 43,80 |
| BT 40             | 25       | 90      | 13-7624-40-25-90      | 43,80 |
| BT 40             | 32       | 100     | 13-7624-40-32-100     | 50,00 |
| BT 40             | 40       | 120     | 13-7624-40-40-105     | 66,90 |
| BT 50             | 6        | 63      | 13-7624-50-6-63       | 69,50 |
| BT 50             | 8        | 63      | 13-7624-50-8-63       | 69,50 |
| BT 50             | 10       | 63      | 13-7624-50-10-63      | 69,50 |
| BT 50             | 12       | 80      | 13-7624-50-12-80      | 69,50 |
| BT 50             | 14       | 80      | 13-7624-50-14-80      | 69,50 |
| BT 50             | 16       | 80      | 13-7624-50-16-80      | 69,50 |
| BT 50             | 20       | 80      | 13-7624-50-20-80      | 69,50 |
| BT 50             | 25       | 100     | 13-7624-50-25-100     | 69,50 |
| BT 50             | 32       | 105     | 13-7624-50-32-105     | 73,60 |
| BT 50             | 40       | 110     | 13-7624-50-40-115     | 77,70 |

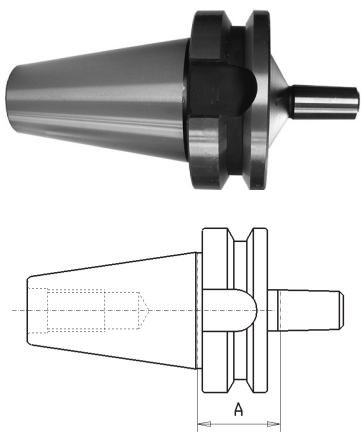

Gewuchtet G = 6,3 15.000 U/min.  
Vyvážení G = 6,3 15 000 U/min.

Bohrfutteraufnahmen MAS BT  
Adaptéry vrtacích sklíčidel MAS BT

| Größe /<br>Rozměr | Kegel /<br>Kůžel | A<br>mm | Art.-Nr. /<br>Obj. č. | EUR   |
|-------------------|------------------|---------|-----------------------|-------|
| BT 40             | B12              | 32      | 13-5373-40-B12        | 38,40 |
| BT 40             | B16              | 32      | 13-5373-40-B16        | 38,40 |
| BT 50             | B16              | 45      | 13-5373-50-B16        | 66,90 |
| BT 50             | B18              | 45      | 13-5373-50-B18        | 66,90 |

