




MAS BT





Gewuchtet G = 6,3 15.000 U/min.
Vybážení G = 6,3 15 000 U/min.



Gewuchtet G = 6,3 15.000 U/min.
Vybážení G = 6,3 15 000 U/min.



Gewuchtet G = 6,3 15.000 U/min.
Vybážení G = 6,3 15 000 U/min.

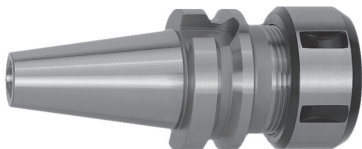

Gewuchtet G = 6,3 15.000 U/min.
Vybážení G = 6,3 15 000 U/min.

Zwischenhülsen MAS BT für MK-Werkzeuge mit Austreibblappen Redukční adaptéry MAS BT pro nástroje MT s vyrážecem

Größe / Rozměr	MK / MT	A mm	Art.-Nr. / Obj. č.	EUR
BT 40	1	50	13-1661-40/1	37,80
BT 40	2	50	13-1661-40/2	37,80
BT 40	3	70	13-1661-40/3	37,80
BT 40	4	95	13-1661-40/4	37,80
BT 50	1	45	13-1661-50/1	61,40
BT 50	2	60	13-1661-50/2	61,40
BT 50	3	65	13-1661-50/3	61,40
BT 50	4	95	13-1661-50/4	61,40
BT 50	5	120	13-1661-50/5	68,20

Zwischenhülsen MAS BT für MK-Werkzeuge mit Anzugsgewinde Redukční adaptéry MAS BT pro nástroje MT se závitem

- mit Anzugsgewinde DIN 6364

- Závít DIN 6364

Größe / Rozměr	MK / MT	A mm	Art.-Nr. / Obj. č.	EUR
BT 40	1	50	13-1694-40/1	40,70
BT 40	2	50	13-1694-40/2	40,70
BT 40	3	70	13-1694-40/3	40,70
BT 40	4	95	13-1694-40/4	40,70
BT 50	1	45	13-1694-50/1	79,70
BT 50	2	60	13-1694-50/2	79,70
BT 50	3	65	13-1694-50/3	79,70
BT 50	4	70	13-1694-50/4	79,70
BT 50	5	120	13-1694-50/5	87,60

Spannzangenfutter MAS BT ER Kleštinová sklíčidla MAS BT ER

Größe / Rozměr	Spannzange / Kleština	A mm	D mm	Art.-Nr. / Obj. č.	EUR
BT 40	ER 16	63	32	13-7626-40-16	42,20
BT 40	ER 25	70	42	13-7626-40-25	42,20
BT 40	ER 32	70	50	13-7626-40-32	42,20
BT 40	ER 40	80	63	13-7626-40-40	42,20
BT 50	ER 32	70	50	13-7626-50-32	86,00
BT 50	ER 40	80	63	13-7626-50-40	86,00

Spannzangenfutter MAS BT OZ Kleštinová sklíčidla MAS BT OZ

Größe / Rozměr	Spannzange / Kleština	A mm	D mm	Art.-Nr. / Obj. č.	EUR
BT 40	OZ16 (415E)	70	43	13-7606-40-16	53,20
BT 40	OZ25 (462E)	70	60	13-7606-40-25	53,20
BT 40	OZ32 (467E)	90	72	13-7606-40-32	56,30
BT 50	OZ25 (462E)	85	60	13-7606-50-25	98,50
BT 50	OZ32 (467E)	90	72	13-7606-50-32	146,00

