


Aufspannwinkel, Typ CD23
Úhelníky, typ CD23


- GG 30 spannungsfrei gegläht
- GG 30, žiháno

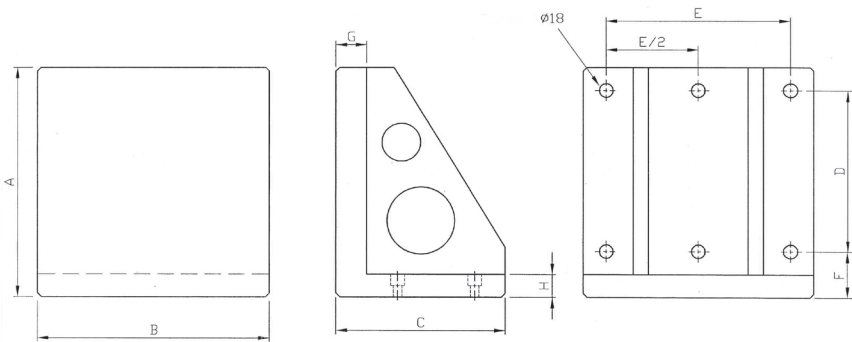

A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	kg	Art.-Nr. / Obj. č.	EUR	
300	300	220	100	250	90	40	30	52	38-CD23-300	617,10	
400	400	280	160	320	90	40	30	90	38-CD23-400	975,20	
500	500	350	200	400	90	50	35	175	38-CD23-500	1.526,20	
630	630	450	250	500	100	50	40	305	38-CD23-630	2.241,10	
800	800	550	320	640	115	50	45	480	38-CD23-800	3.487,20	

Aufspannwinkel mit T-Nuten, Typ RS28
Úhelníky s T-drážkami, typ RS28

- GG 30 spannungsfrei gegläht
- GG 30, žiháno

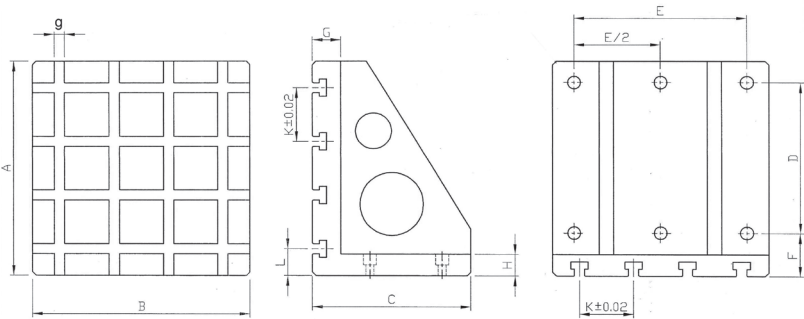

A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	g mm	K mm (± 0,02)	L mm	kg	Art.-Nr. / Obj. č.	EUR	
300	300	220	100	250	90	60	30	Ø18	14	100	50	63	38-RS28-300/14	932,90	
400	400	280	160	320	90	60	30	Ø18	14	100	50	114	38-RS28-400/14	1.494,50	
500	500	350	200	400	90	60	35	Ø18	14	100	50	184	38-RS28-500/14	2.399,70	
630	630	450	250	500	100	60	40	Ø18	14	125	65	316	38-RS28-630/14	3.723,70	
800	800	550	320	640	115	75	45	Ø18	14	150	100	577	38-RS28-800/14	5.840,60	
300	300	220	100	250	90	60	30	Ø18	18	100	50	59	38-RS28-300/18	932,90	
400	400	300	160	320	90	60	30	Ø18	18	100	50	111	38-RS28-400/18	1.494,50	
500	500	350	200	400	90	60	35	Ø18	18	100	50	175	38-RS28-500/18	2.399,70	
630	630	450	250	500	100	65	40	Ø18	18	125	65	304	38-RS28-630/18	3.723,70	

